GENERAL NOTES — MODEL REVIEW SET

1. This set is generated automatically from the Rebuilt Genome (authoritative building description) by the MODEL compiler.
   Plans, elevations, sections, the IFC file and the GLB file are produced from the same compiled solids.
2. Purpose: checking the reconstructed building against evidence. It is NOT a permit, construction, or engineering document.
3. Dimensions are shown as feet-inches with metres in brackets. Wall dimensions are to outside faces unless noted.
4. Every value carries a basis: measured · extracted (from a document) · observed · inferred · assumed · unknown.
   Plan poche colour shows the least-certain basis of each wall's thickness/height. Uncertainties are ± bounds.
5. Doors and windows are drawn as proxy panels and generic symbols; frames, trim, hardware and swing direction
   are only as specific as the 'operation' recorded in Genome.
6. NOT MODELLED (declared scope extensions): framing, structure, foundations below slab, MEP, stairs, finishes, site, estimating.

VALUES THAT ARE NOT MEASURED, OR NOT VERIFIED AS DISPUTE-FREE

Element	Param	Value	Basis	Uncert.	Conf.	Verification	Note / input
R-main	thickness	0'-7 7/8" [0.200]	assumed	—	—	unverified	
R-mud	pitch	3:12	observed	±0.040	0.60	unverified	about 3:12 (from photo)
R-mud	thickness	0'-5 7/8" [0.150]	assumed	—	—	unverified	
S-U-ceiling	thickness	0'-0 5/8" [0.016]	assumed	—	—	unverified	
W-G-BE	height	—	observed	—	—	unverified	clipped to roof R-mud (governed by roof pitch)
W-G-BW	height	—	observed	—	—	unverified	clipped to roof R-mud (governed by roof pitch)
W-U-S	thickness	0'-7 7/8" [0.200]	inferred	±0.030	0.70	unverified	

COMPILER FINDINGS

No errors, warnings or unsupported features.

EXPORT NOTES

- IFC: IFC4; independent OCC check PASSED (30 elements)
- GLB: 36 nodes, identity via node extras + sidecar JSON
- Chief Architect / Revit / SketchUp: no tested native integration yet — see INTEGRATIONS.md

Wall poche colour = least-certain basis of thickness/height:

measured · extracted · observed · inferred · assumed · unknown

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`

Generated 2026-10-15

SCALE

as noted / NTS

GENERAL NOTES


G-001

OPENING SCHEDULE

Dimensions are rough-opening sizes recorded in Genome; feet-inches with metres in brackets.

ID	Host wall	Storey	Kind	Operation	Width	Height	Sill	Head (abs. elev.)	Least-certain basis	Unc. ±
O-G-BE-W5	W-G-BE	G	window	fixed	2'-7 1/2" [0.800]	3'-3 3/8" [1.000]	3'-3 3/8" [1.000]	6'-6 3/4" [2.000]	measured	0.003
O-G-BS-D2	W-G-BS	G	door	single-swing-right	2'-11 7/16" [0.900]	6'-7 15/16" [2.030]	0'-0" [0.000]	6'-7 15/16" [2.030]	measured	0.003
O-G-E-D1	W-G-E	G	door	single-swing-left	2'-11 7/16" [0.900]	6'-7 15/16" [2.030]	0'-0" [0.000]	6'-7 15/16" [2.030]	measured	0.003
O-G-N-W3	W-G-N	G	window	slider	3'-3 3/8" [1.000]	3'-3 3/8" [1.000]	3'-7 5/16" [1.100]	6'-10 11/16" [2.100]	measured	0.003
O-G-S-V1	W-G-S	G	void	—	5'-3" [1.600]	6'-10 11/16" [2.100]	0'-0" [0.000]	6'-10 11/16" [2.100]	measured	0.003
O-G-S-W1	W-G-S	G	window	double-hung	3'-11 1/4" [1.200]	3'-11 1/4" [1.200]	2'-11 7/16" [0.900]	6'-10 11/16" [2.100]	measured	0.003
O-G-S-W2	W-G-S	G	window	double-hung	3'-11 1/4" [1.200]	3'-11 1/4" [1.200]	2'-11 7/16" [0.900]	6'-10 11/16" [2.100]	measured	0.003
O-G-W-W4	W-G-W	G	window	casement	3'-3 3/8" [1.000]	3'-11 1/4" [1.200]	2'-11 7/16" [0.900]	6'-10 11/16" [2.100]	measured	0.003
O-U-N-W8	W-U-N	U	window	double-hung	3'-3 3/8" [1.000]	3'-11 1/4" [1.200]	2'-11 7/16" [0.900]	16'-6 13/16" [5.050]	measured	0.003
O-U-S-W6	W-U-S	U	window	double-hung	3'-3 3/8" [1.000]	3'-11 1/4" [1.200]	2'-11 7/16" [0.900]	16'-6 13/16" [5.050]	measured	0.003
O-U-S-W7	W-U-S	U	window	double-hung	3'-3 3/8" [1.000]	3'-11 1/4" [1.200]	2'-11 7/16" [0.900]	16'-6 13/16" [5.050]	measured	0.003
O-U-W-W9	W-U-W	U	window	fixed	2'-7 1/2" [0.800]	3'-3 3/8" [1.000]	3'-11 1/4" [1.200]	16'-10 3/4" [5.150]	measured	0.003

N (project)

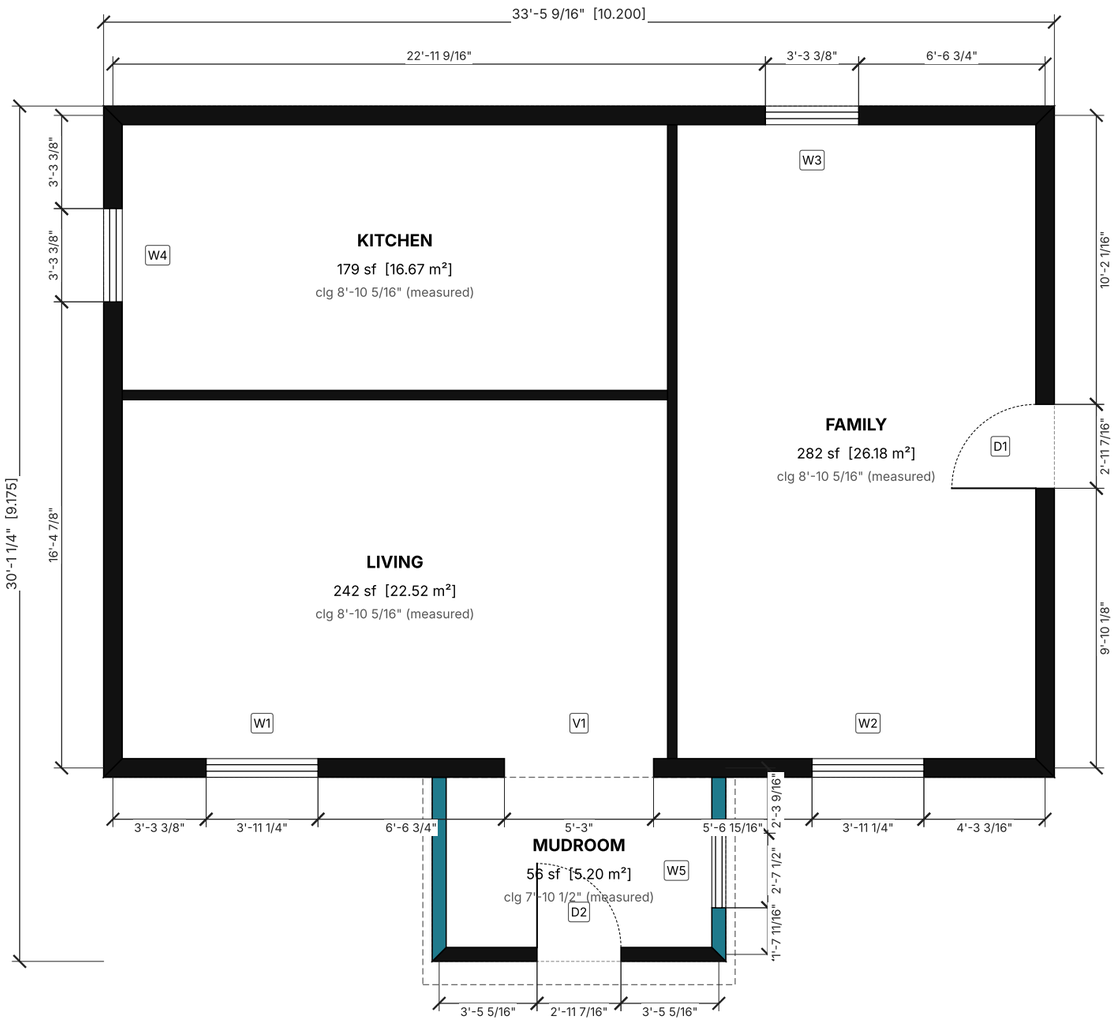

Wall poche colour = least-certain basis of thickness/height:

measured · extracted · observed · inferred · assumed · unknown

Plan cut at 3'-11 1/4" above storey elevation 0'-0" · string dims measured along wall baseline (C/L for centre-aligned walls)

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`

Generated 2026-10-15


SCALE

3/16" = 1'-0"

PLAN — GROUND

A-100

N (project)

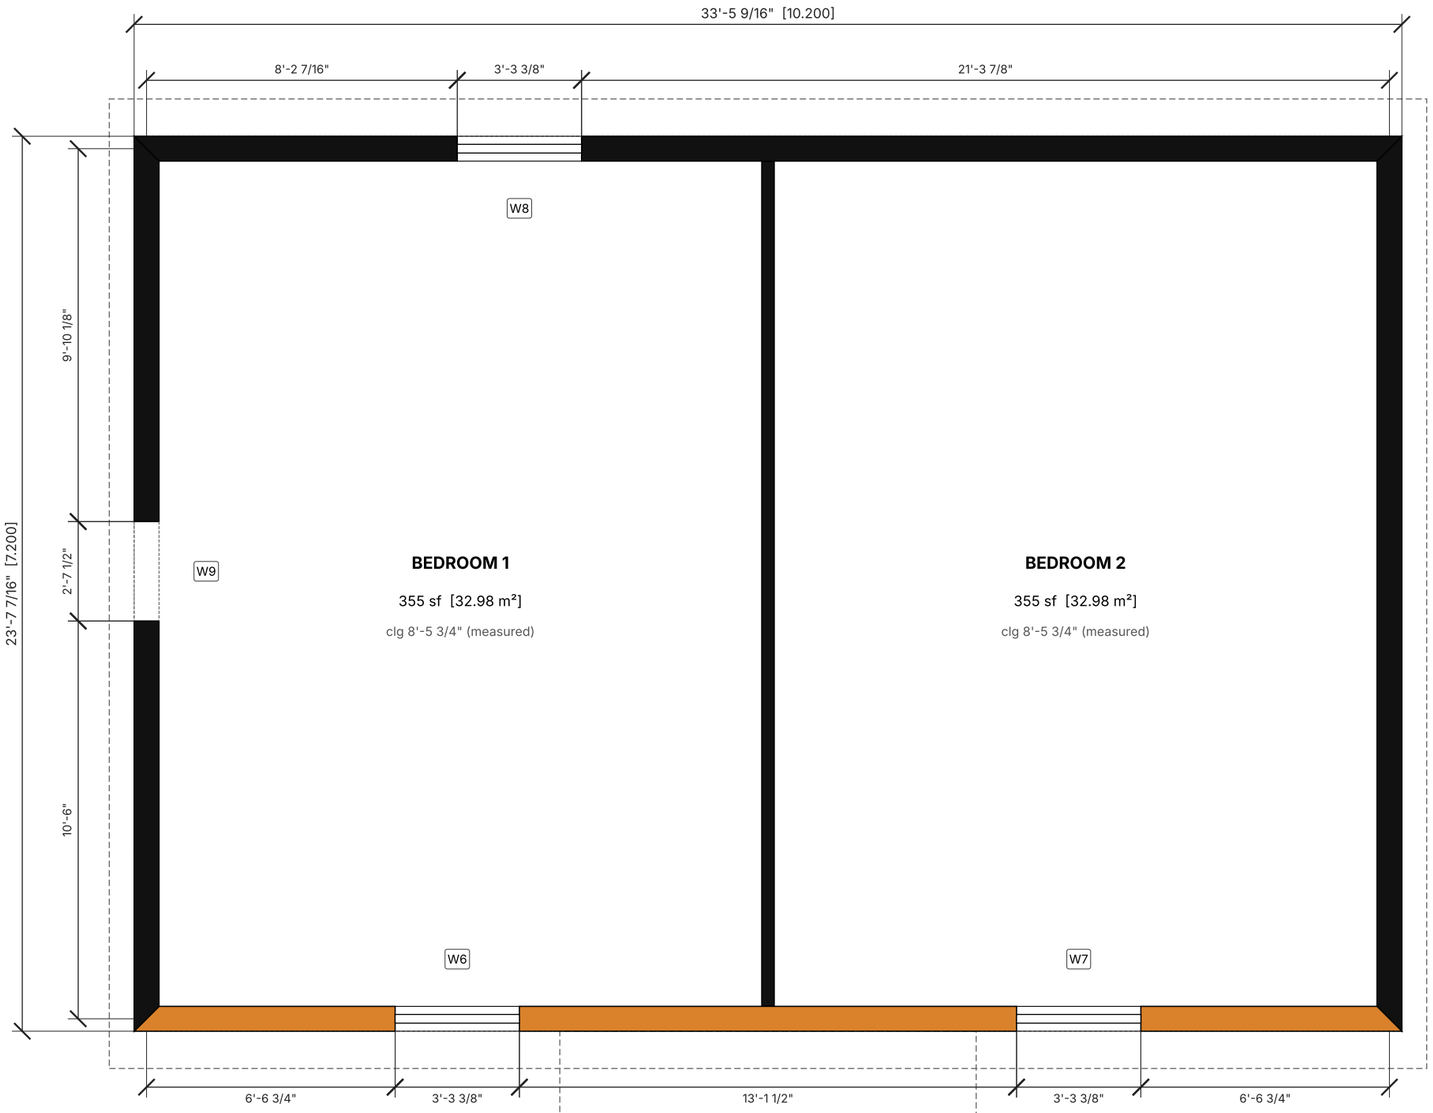

Wall poche colour = least-certain basis of thickness/height:

measured · extracted · observed · inferred · assumed · unknown

Plan cut at 3'-11 1/4" above storey elevation 9'-8 1/8" · string dims measured along wall baseline (C/L for centre-aligned walls)

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`


Generated 2026-10-15

SCALE

1/4" = 1'-0"

PLAN — UPPER

A-101

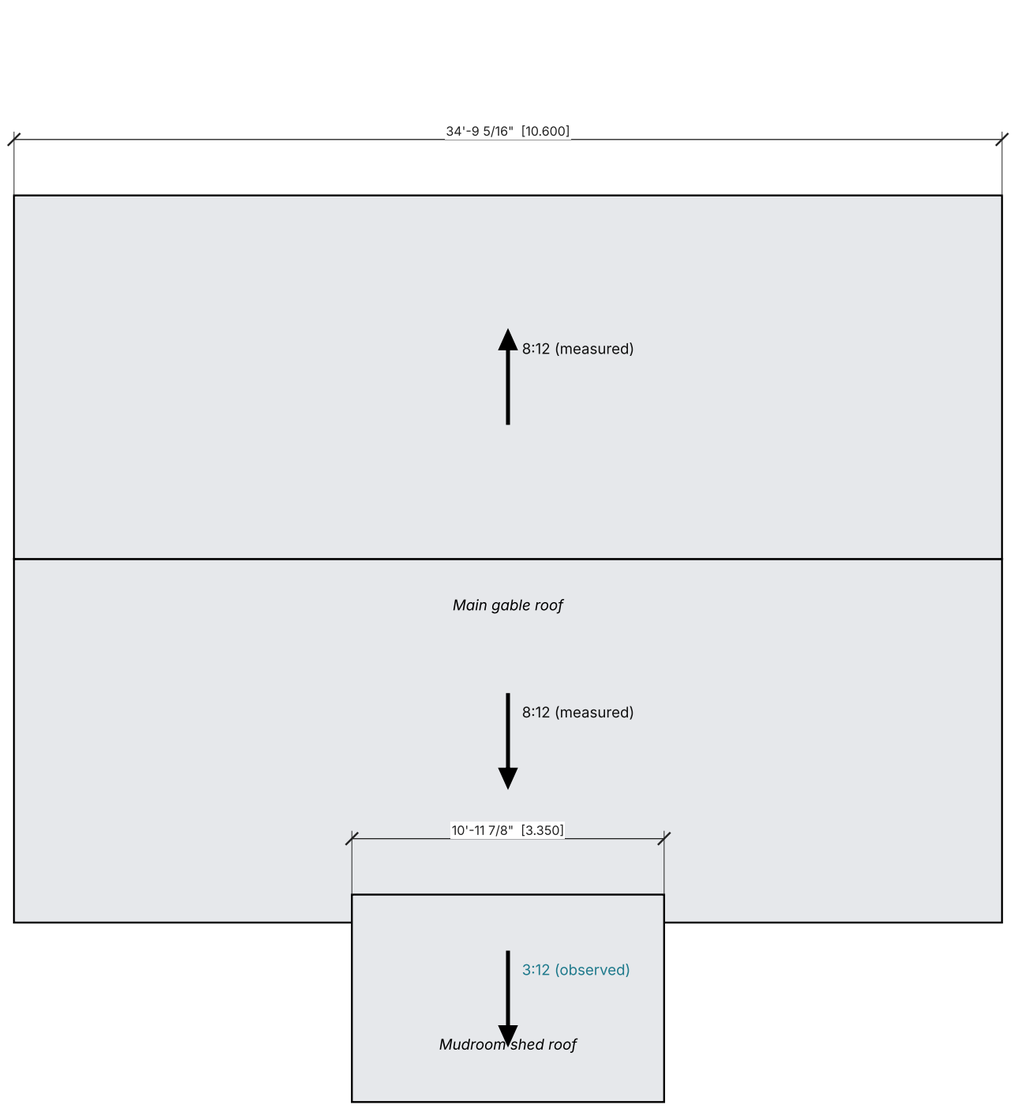

Arrows point downslope. Panel boundaries are ridges/hips derived from eave planes (lower envelope). Dashed: exterior wall outlines.

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`

Generated 2026-10-15

SCALE


3/16" = 1'-0"

ROOF PLAN

A-110



SOUTH ELEVATION

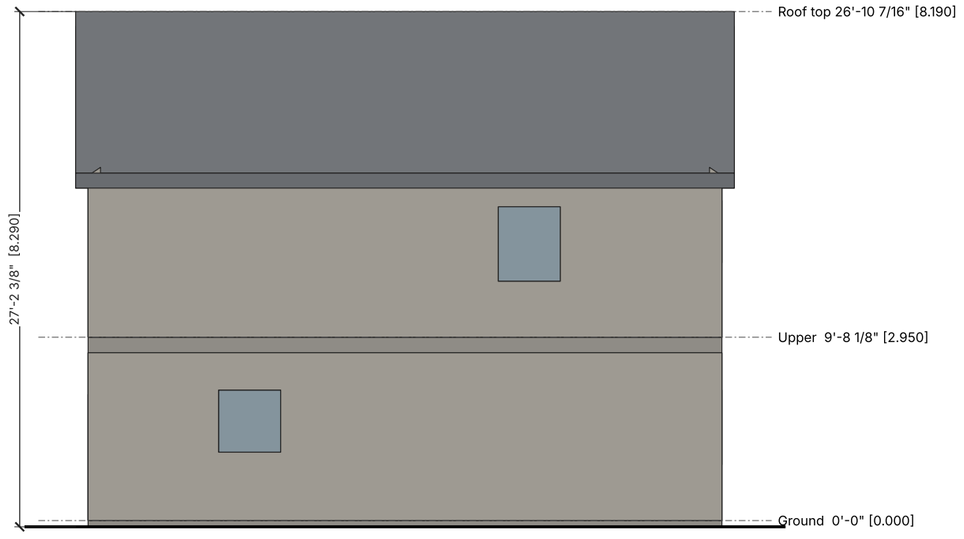

NORTH ELEVATION

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`


Generated 2026-10-15

SCALE


1/8" = 1'-0"

EXTERIOR ELEVATIONS

A-201

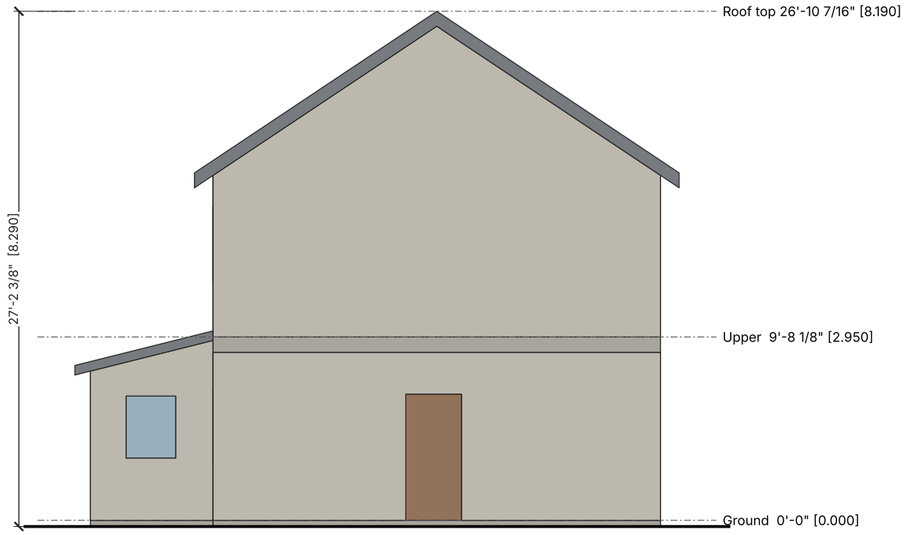

EAST ELEVATION

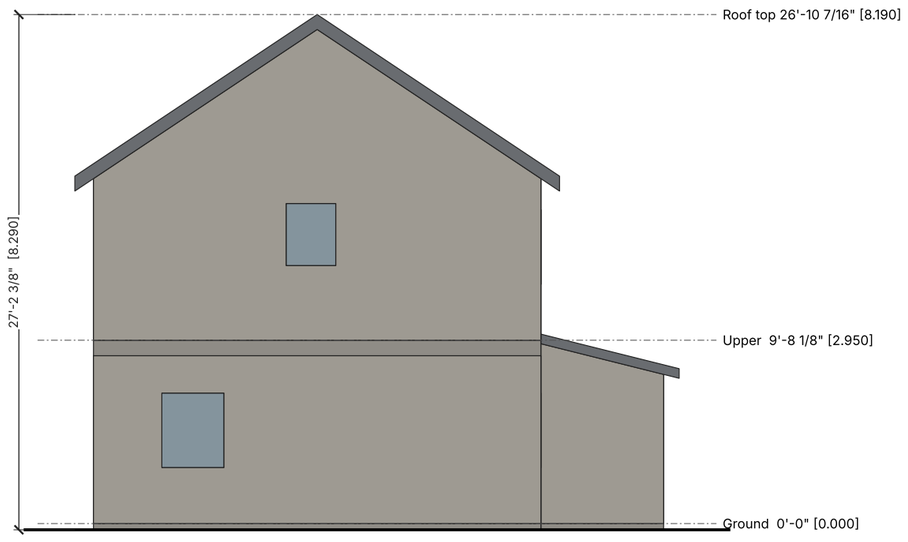

WEST ELEVATION

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`


Generated 2026-10-15

SCALE

1/8" = 1'-0"

EXTERIOR ELEVATIONS

A-202

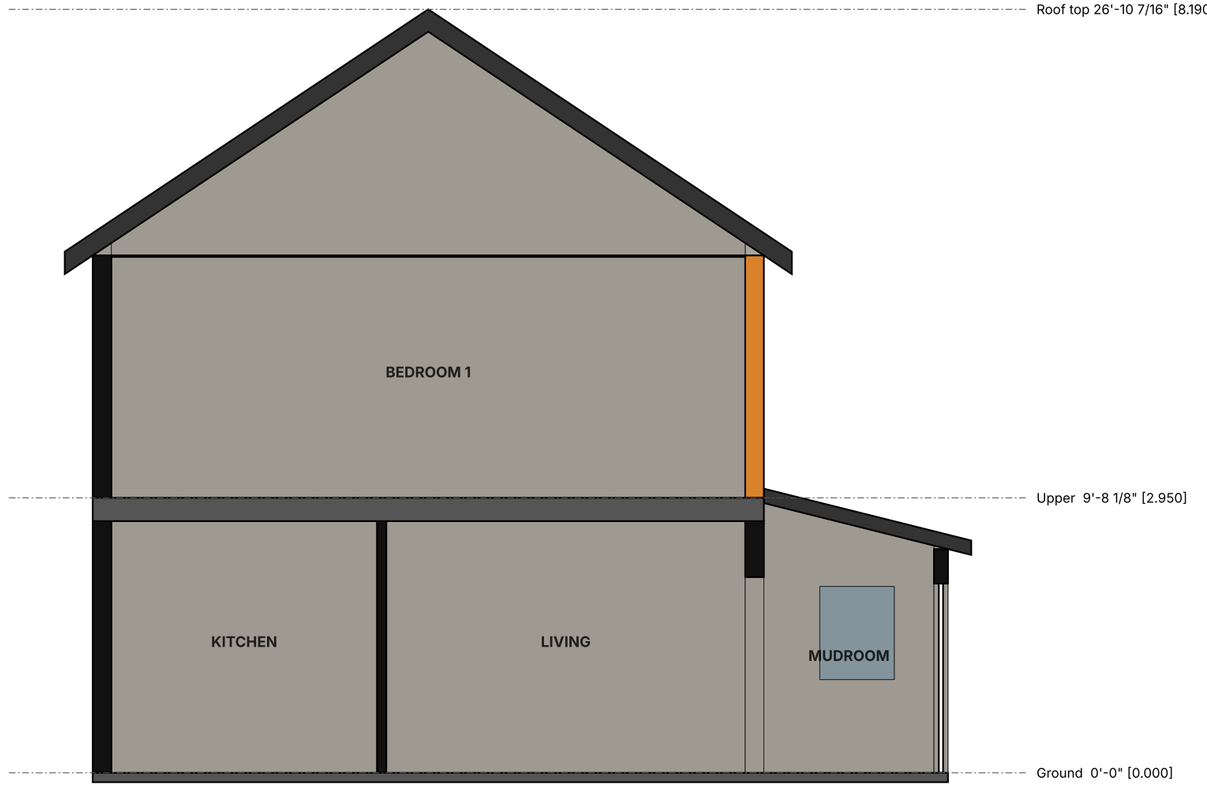

Section plane through (4.60, 0.00) looking (1, 0, 0). Cut elements solid (walls coloured by basis); beyond shown in projection.

Wall poche colour = least-certain basis of thickness/height:

measured · extracted · observed · inferred · assumed · unknown

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`

Generated 2026-10-15

SCALE

3/16" = 1'-0"

SECTION A-A (transverse)

A-301



Section plane through (0.00, 2.61) looking (0, 1, 0). Cut elements solid (walls coloured by basis); beyond shown in projection.

Wall poche colour = least-certain basis of thickness/height:

measured · extracted · observed · inferred · assumed · unknown

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`

Generated 2026-10-15


SCALE

3/16" = 1'-0"


SECTION B-B (longitudinal)

A-302


Overall — from south-east

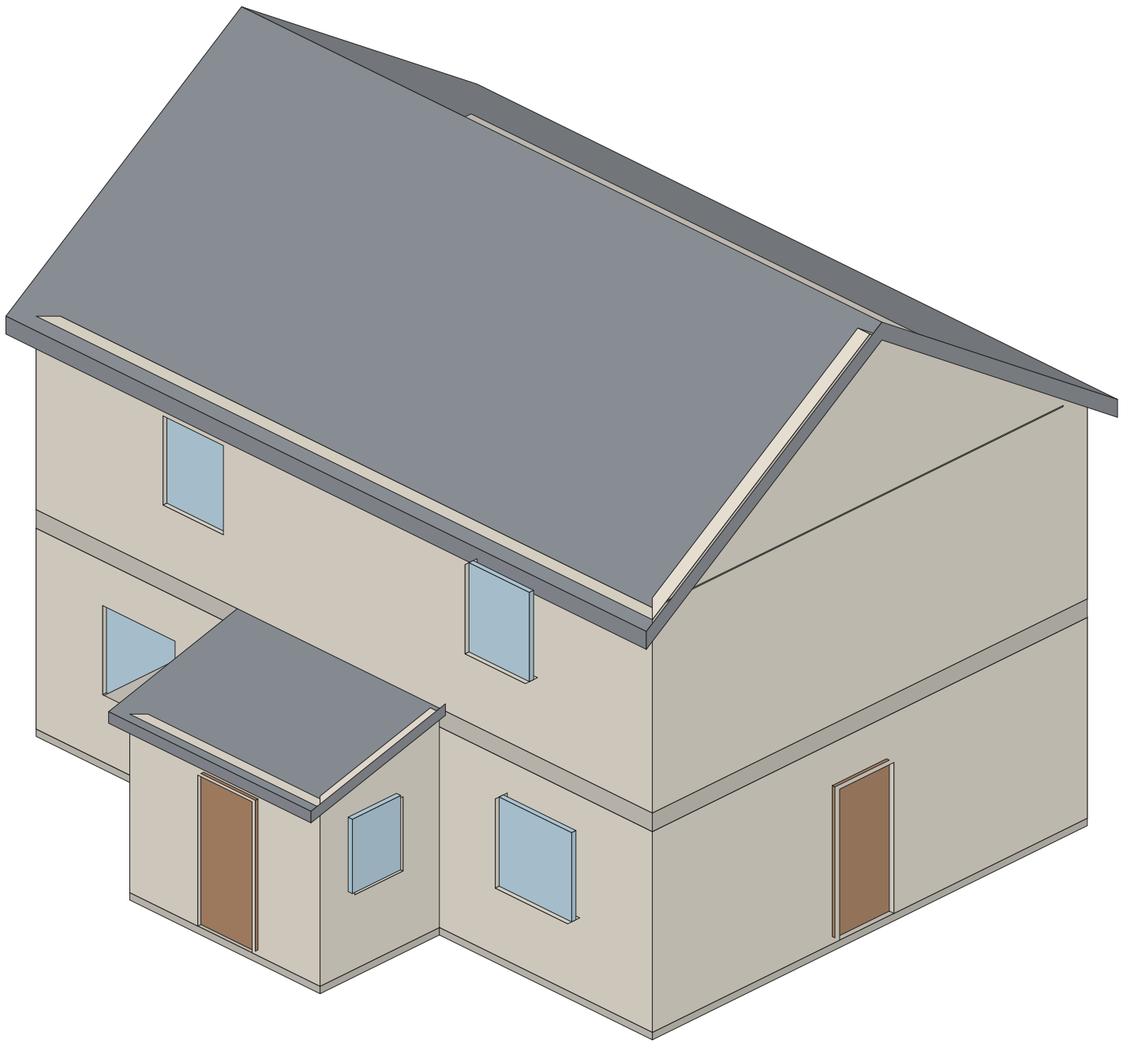

Overall — from north-west

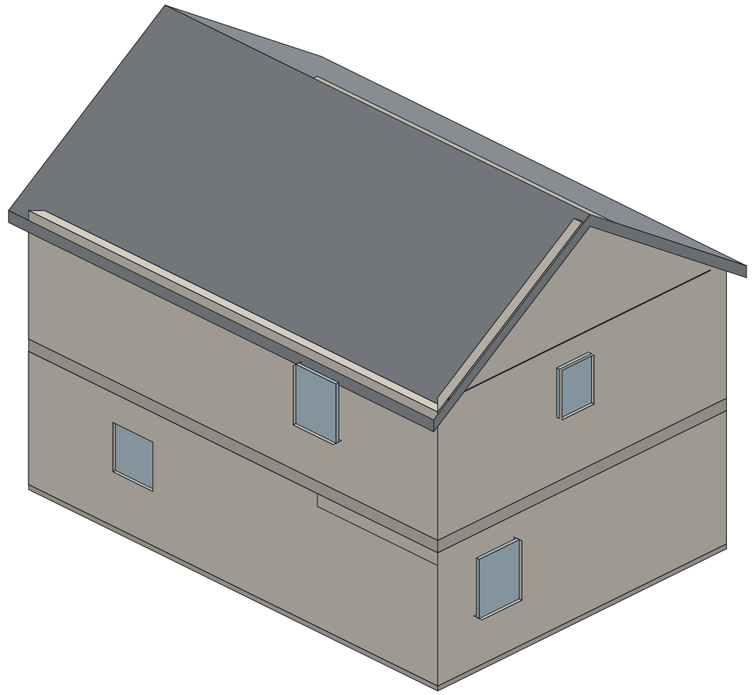

Detail — Mudroom shed roof and adjoining walls (ground storey only)

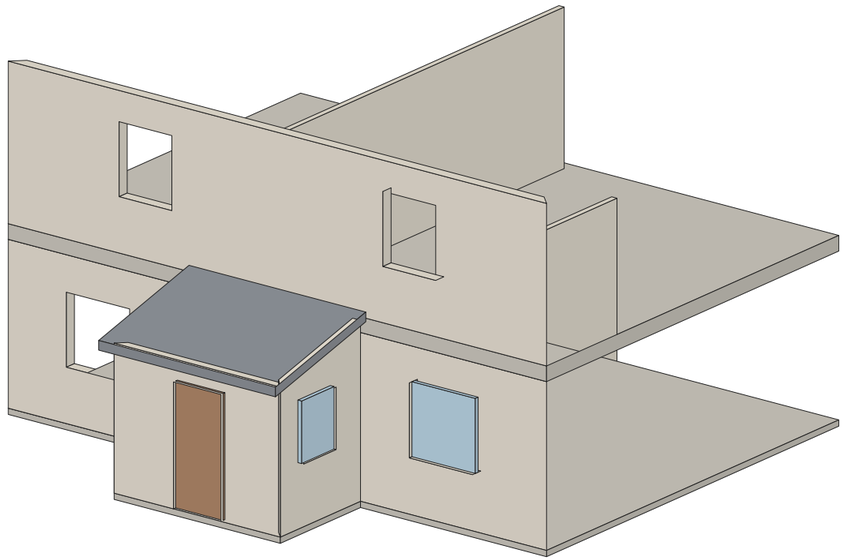

Fictional Test House (FICTIONAL TEST PROJECT)

Property: FICTIONAL — no real address

Rebuilt — rebuilt.homes

MODEL REVIEW DRAWING

NOT FOR PERMIT, CONSTRUCTION, OR PRICING.

Not reviewed or certified by a licensed design professional.
Values carry provenance & uncertainty — see sheet G-001 notes.

Genome rev 0 · profile review

`Model 908370b8eebc · MODEL 0.1.0`

Generated 2026-10-15

SCALE

NTS

3D VIEWS

A-401